


NanoPi Duo2

Revision:


V1.0 1807 first release

V1.1 2405 1.Changed microUSB to USB-C
2. Changed CAM Power LDOs






BLOCK

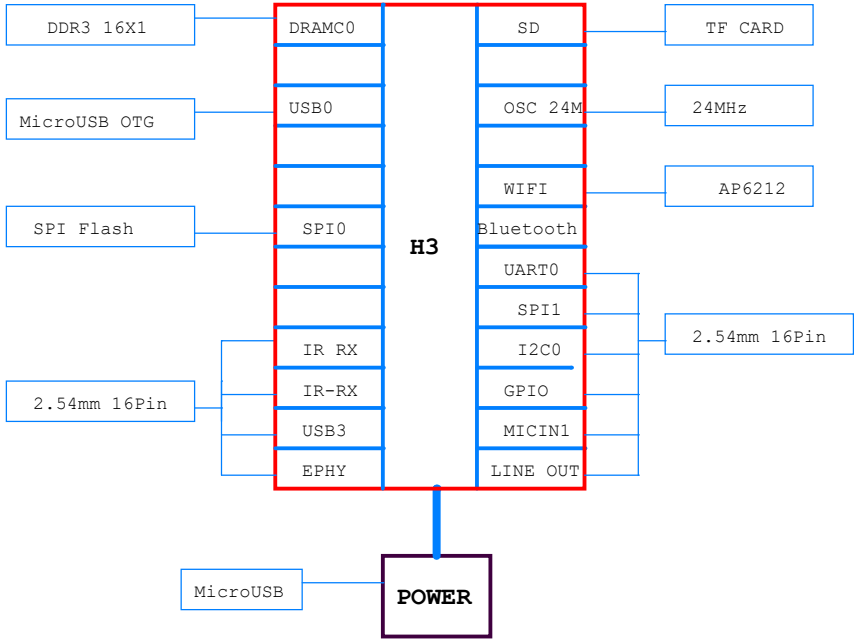


POWER TREE

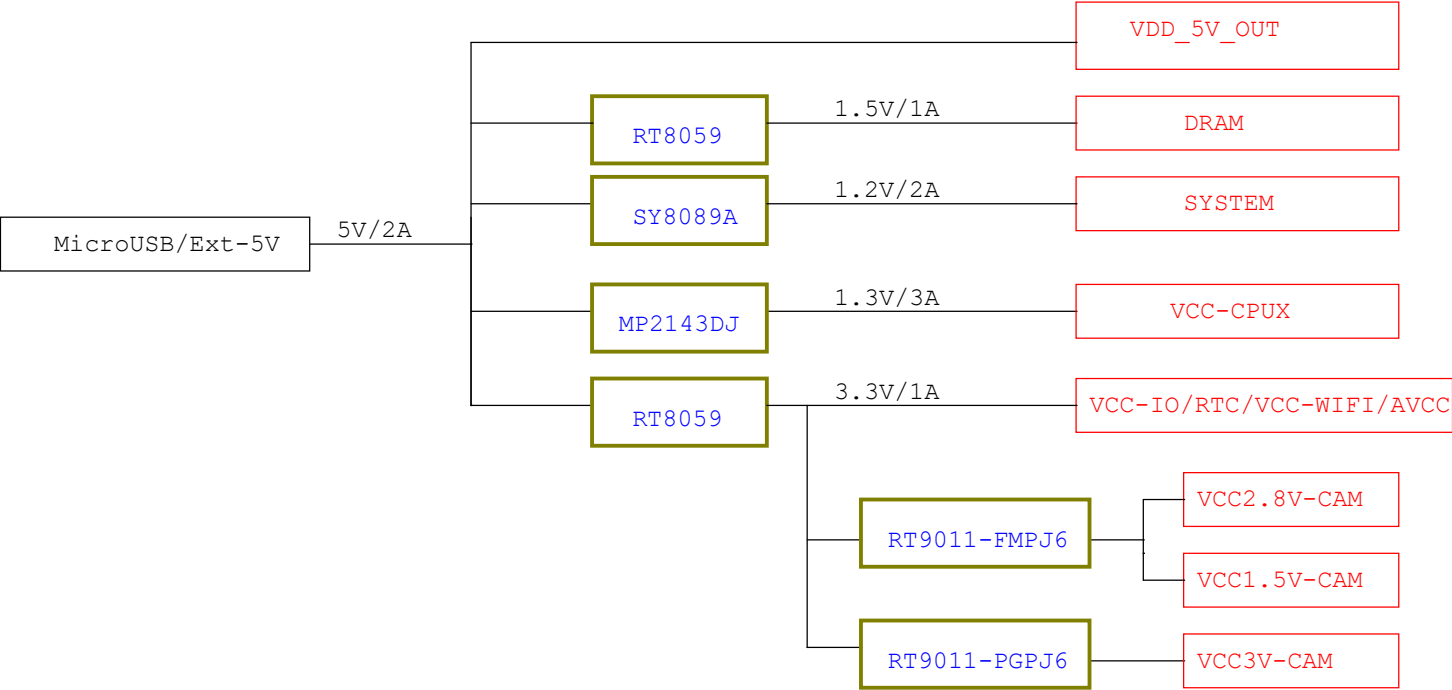


DDR3 16x1

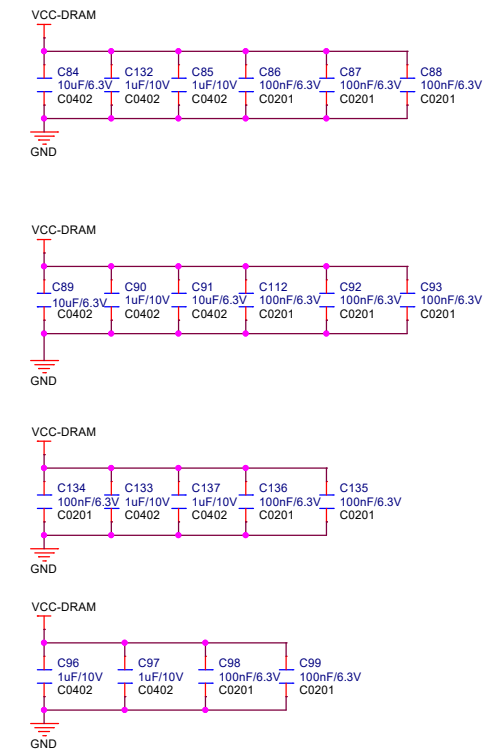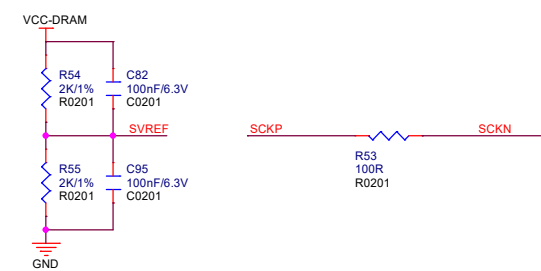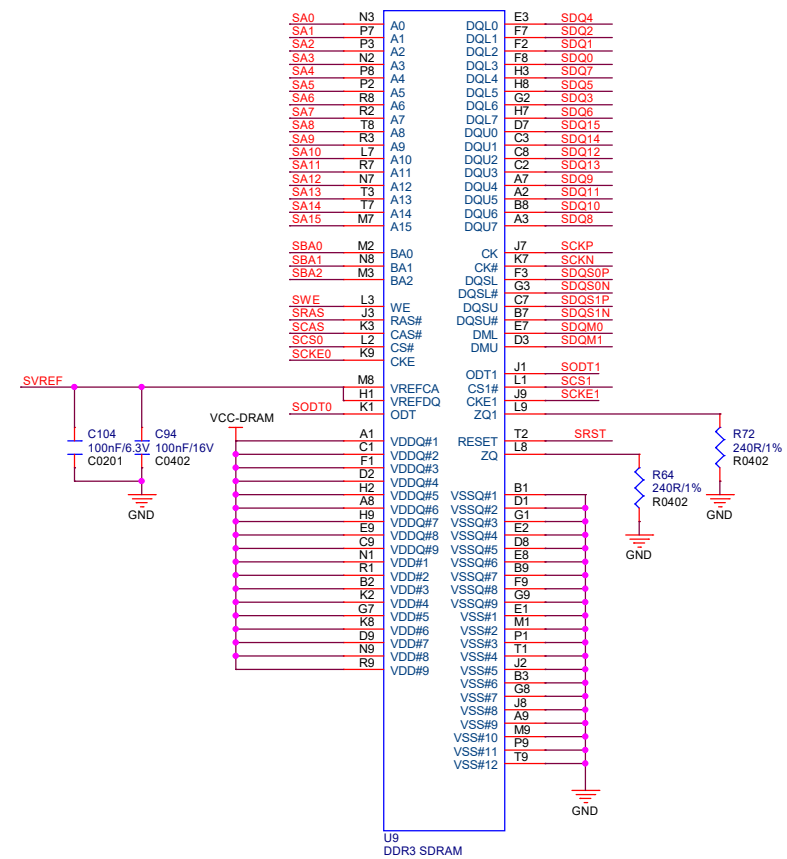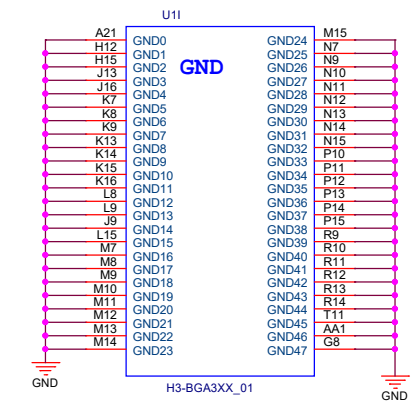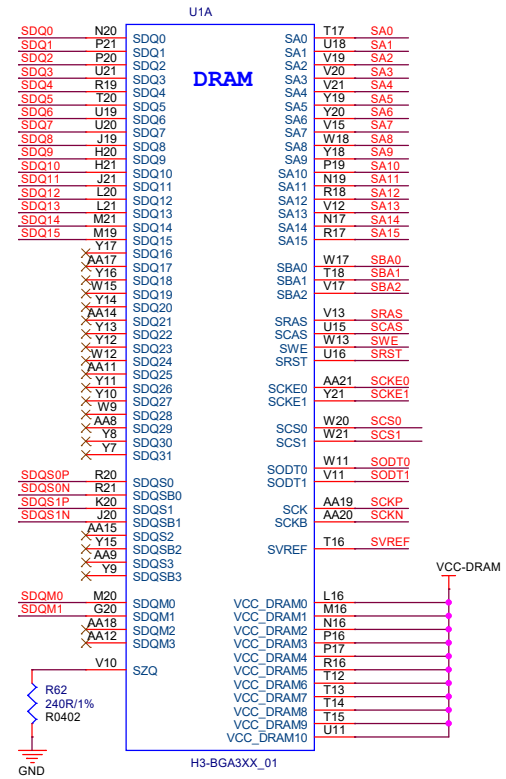


CPU 01

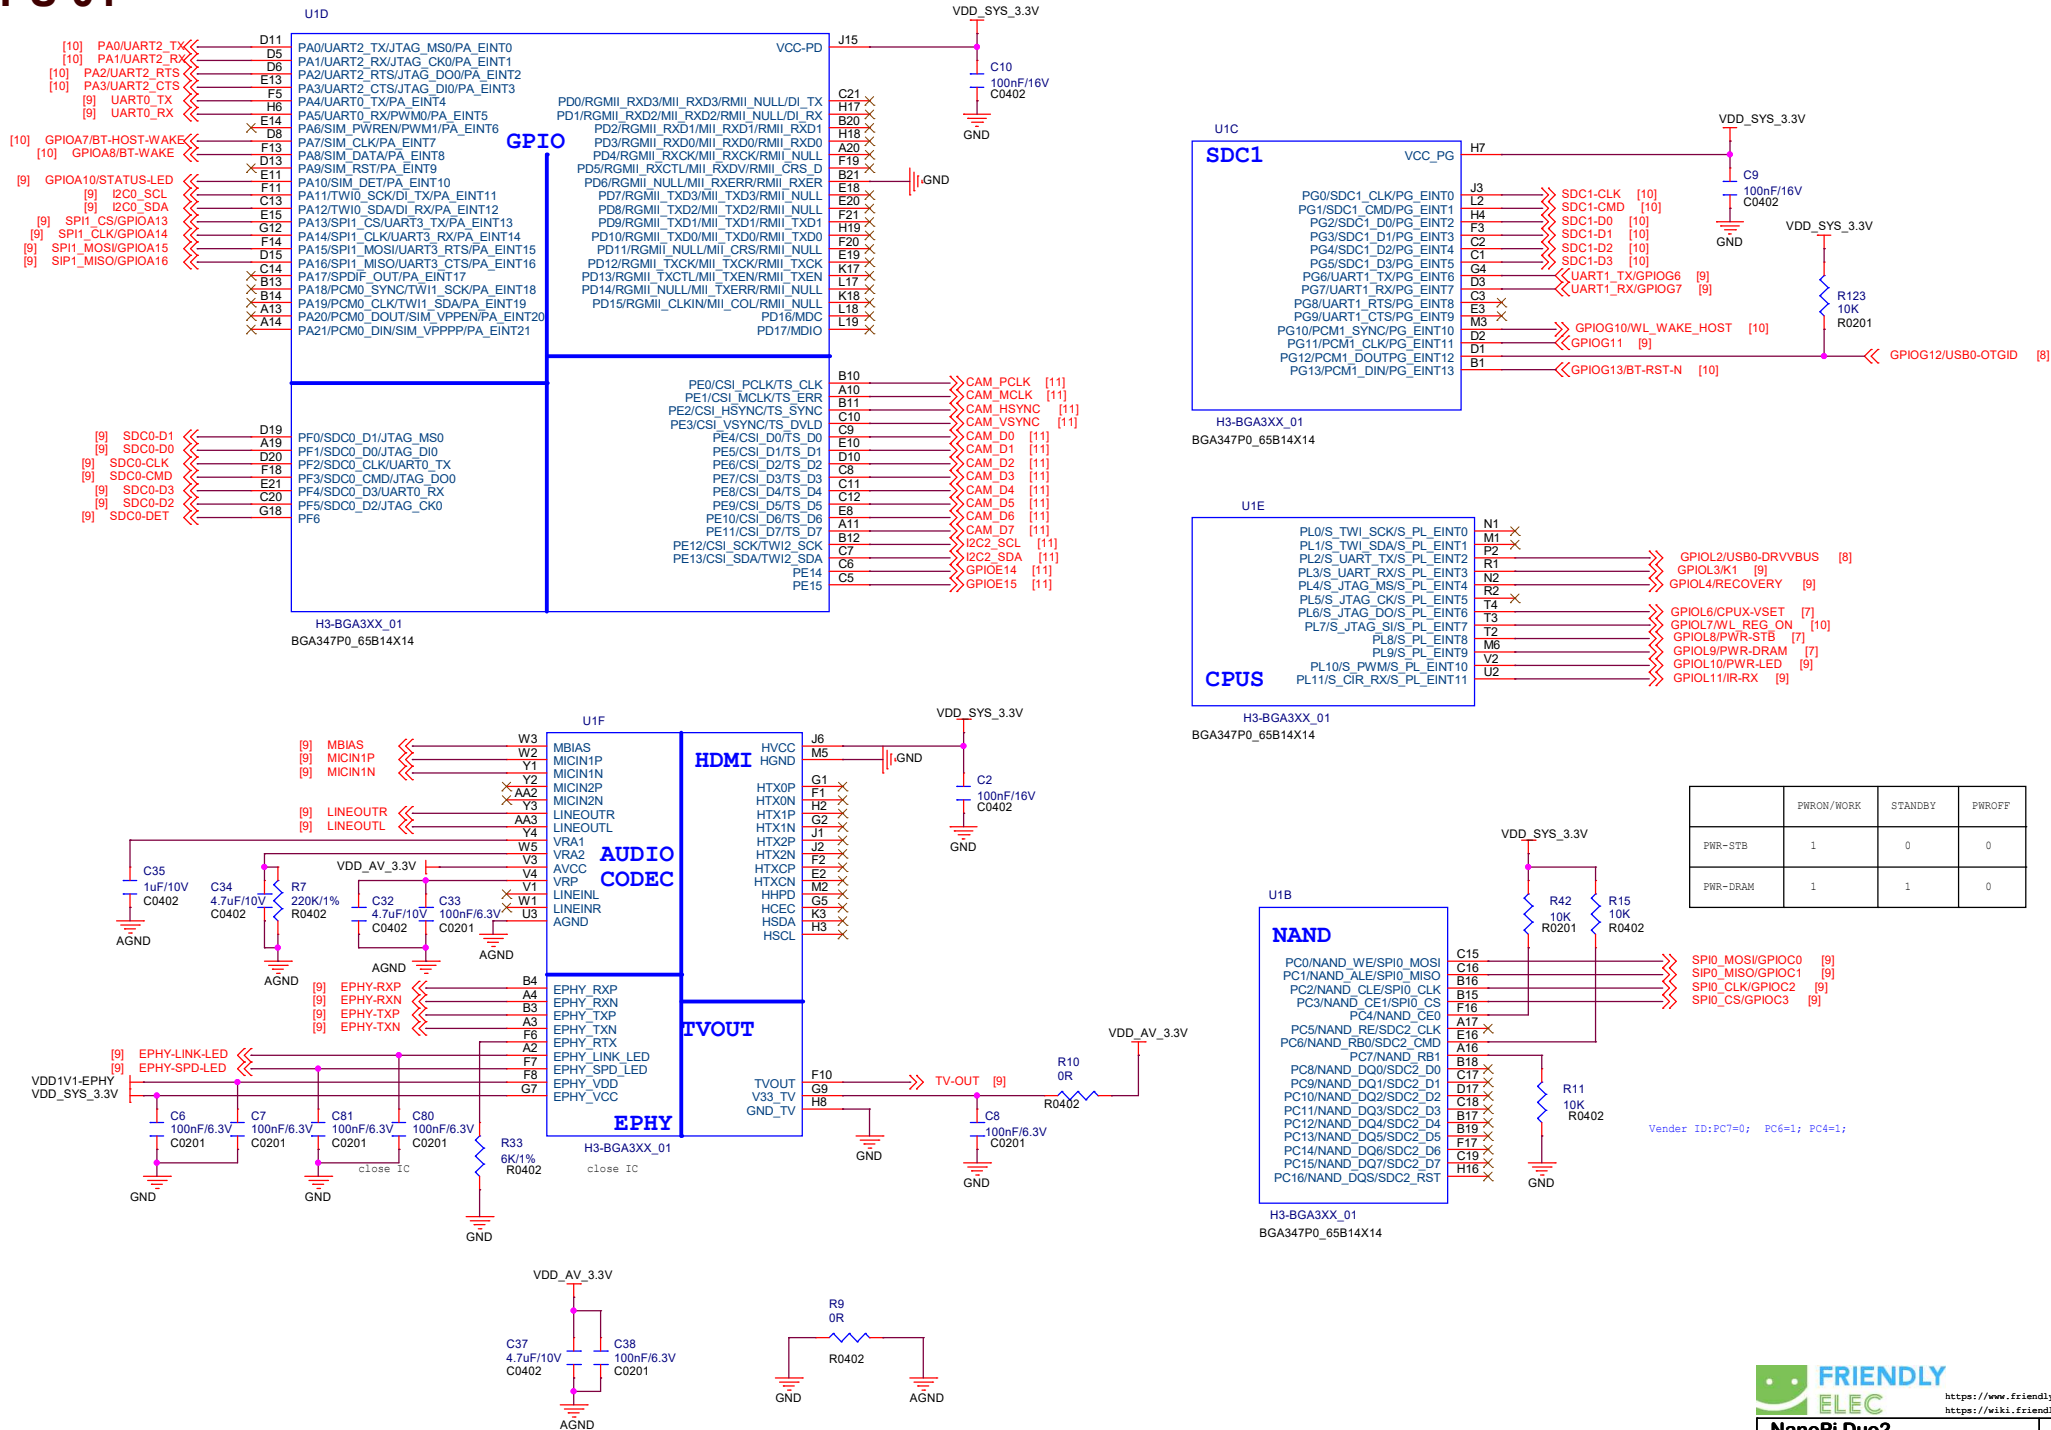


CPU 02

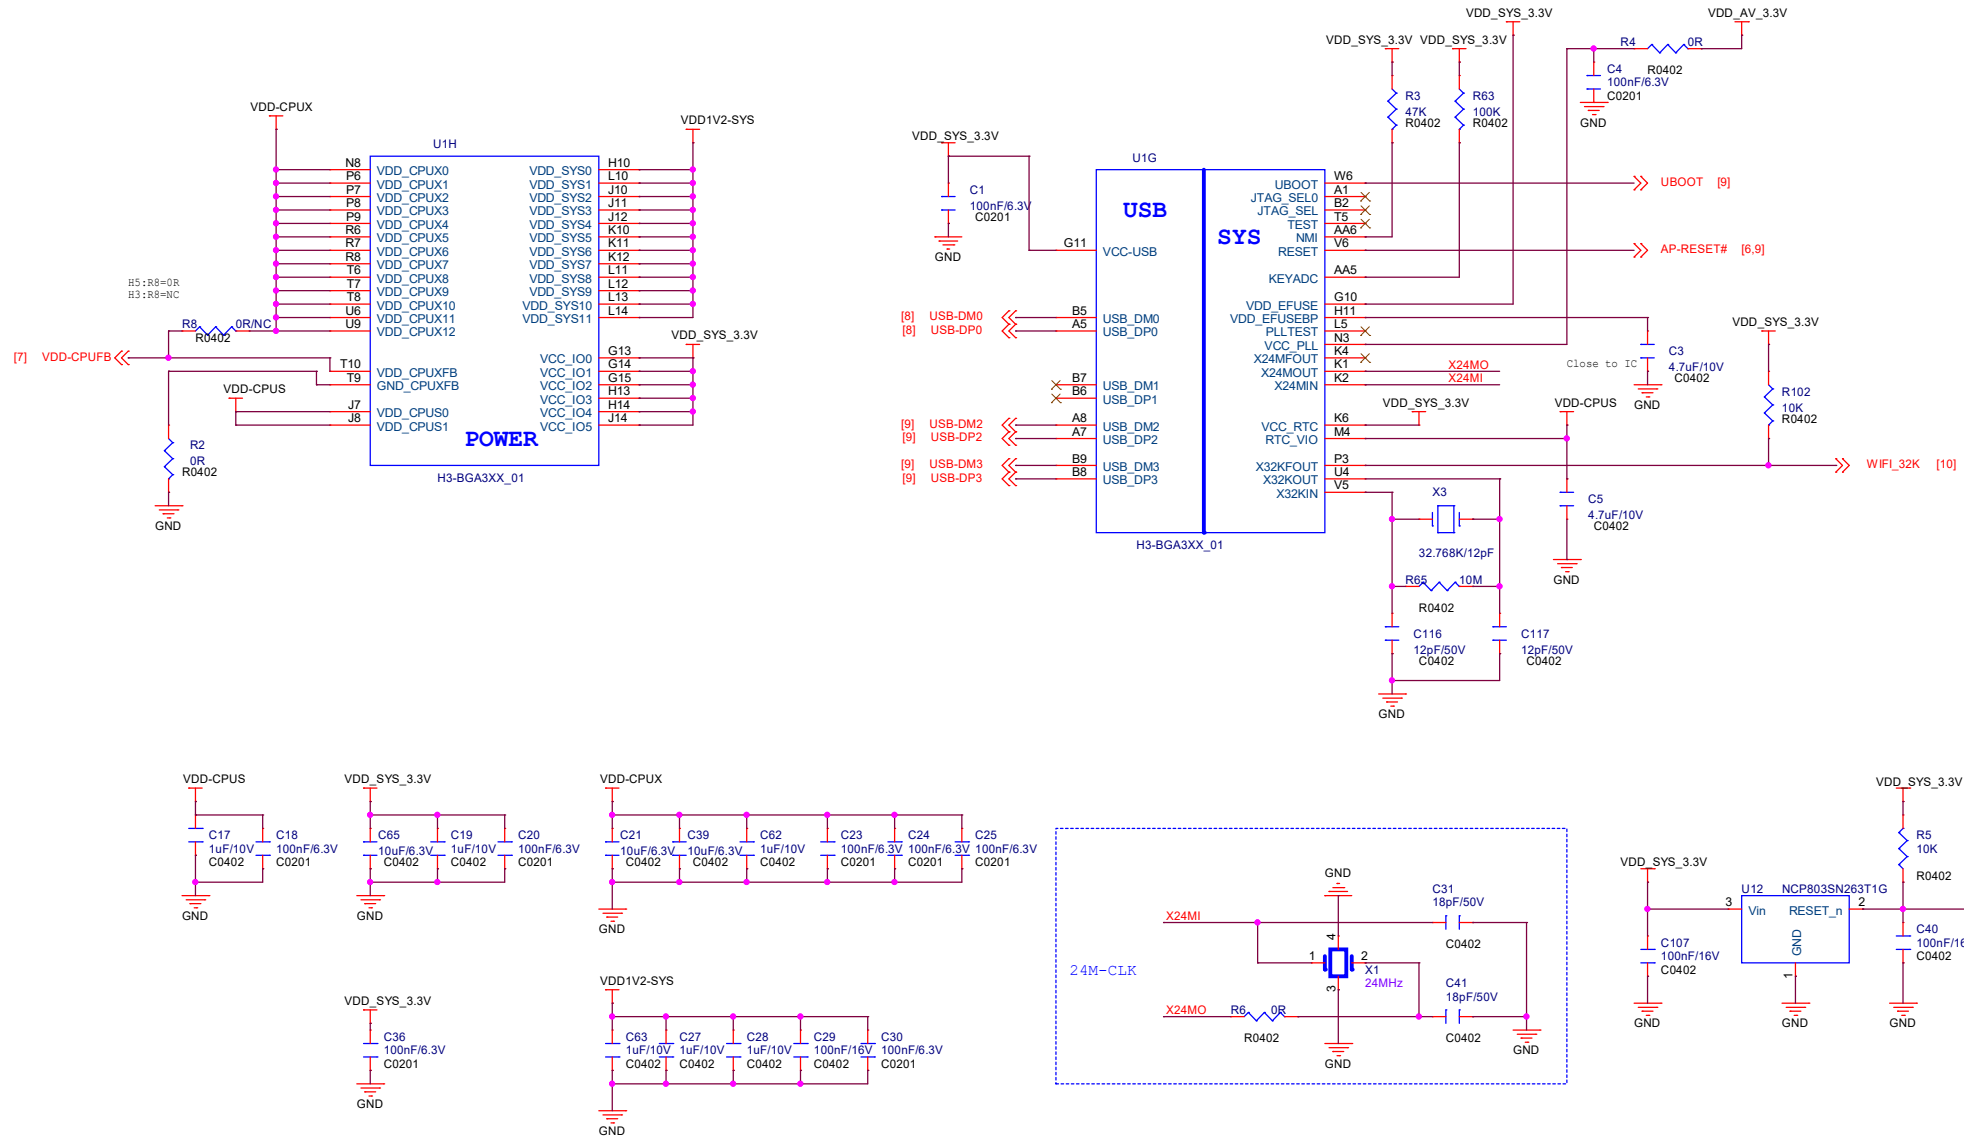


POWER 01

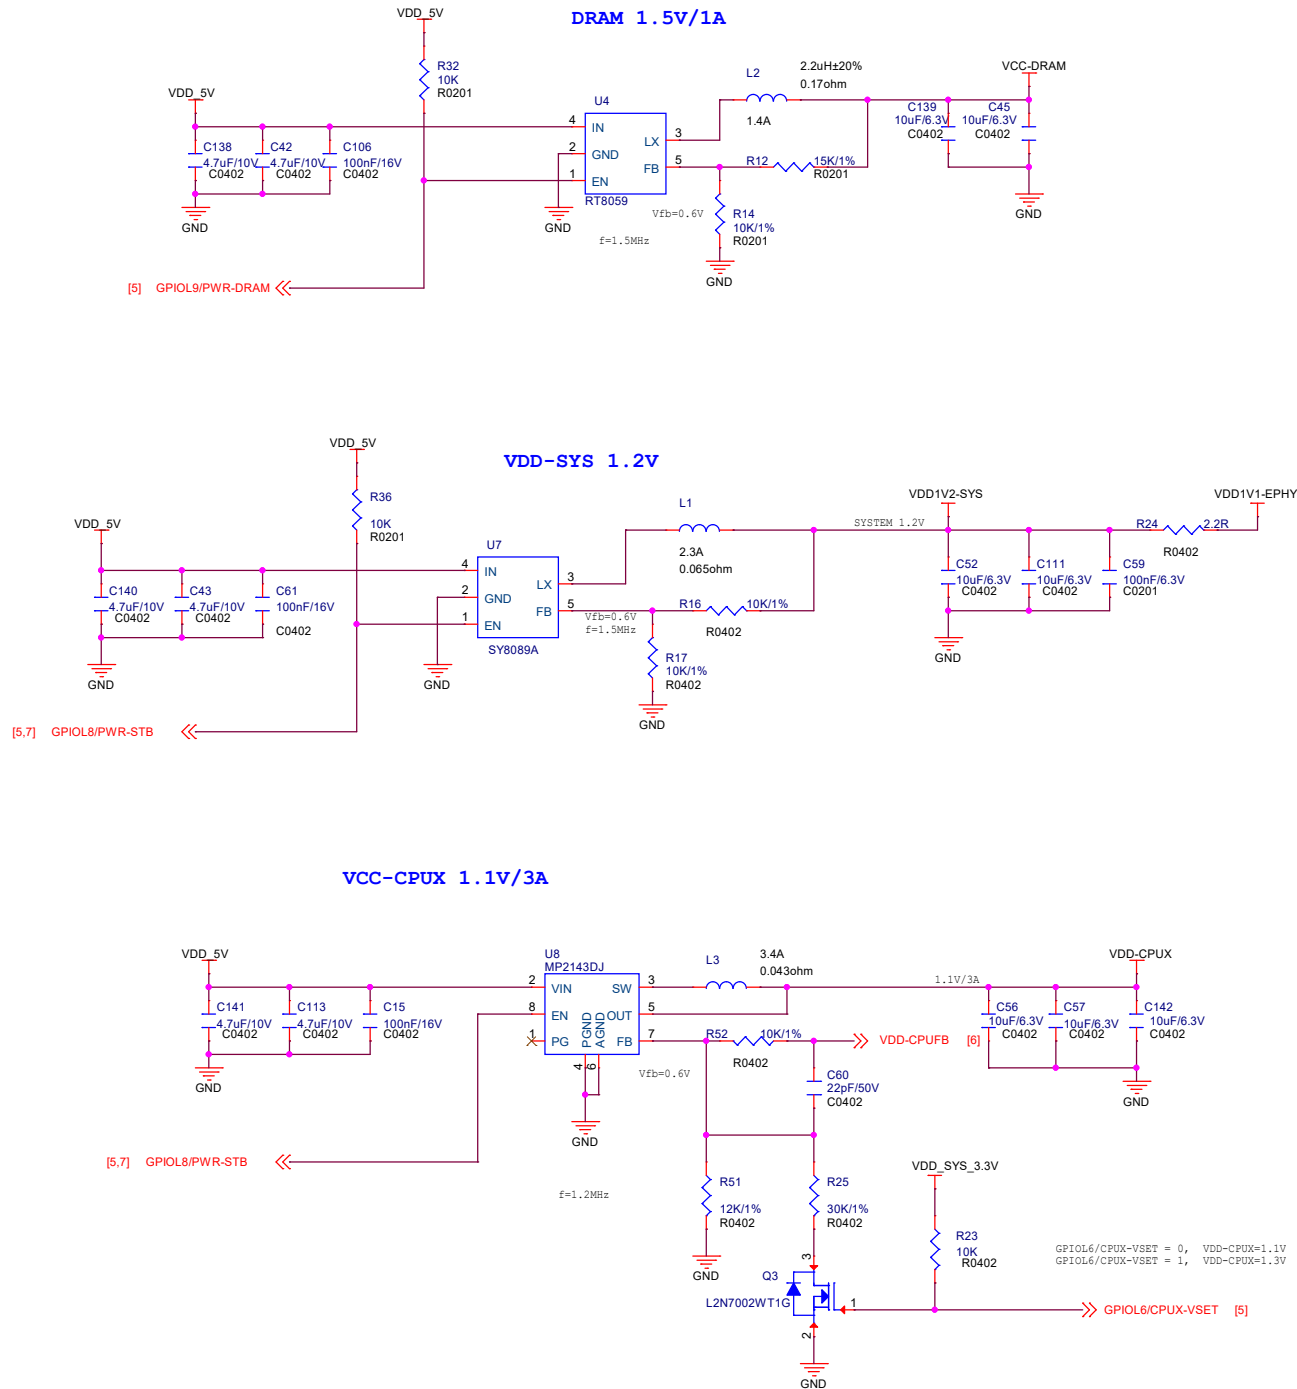


POWER 02

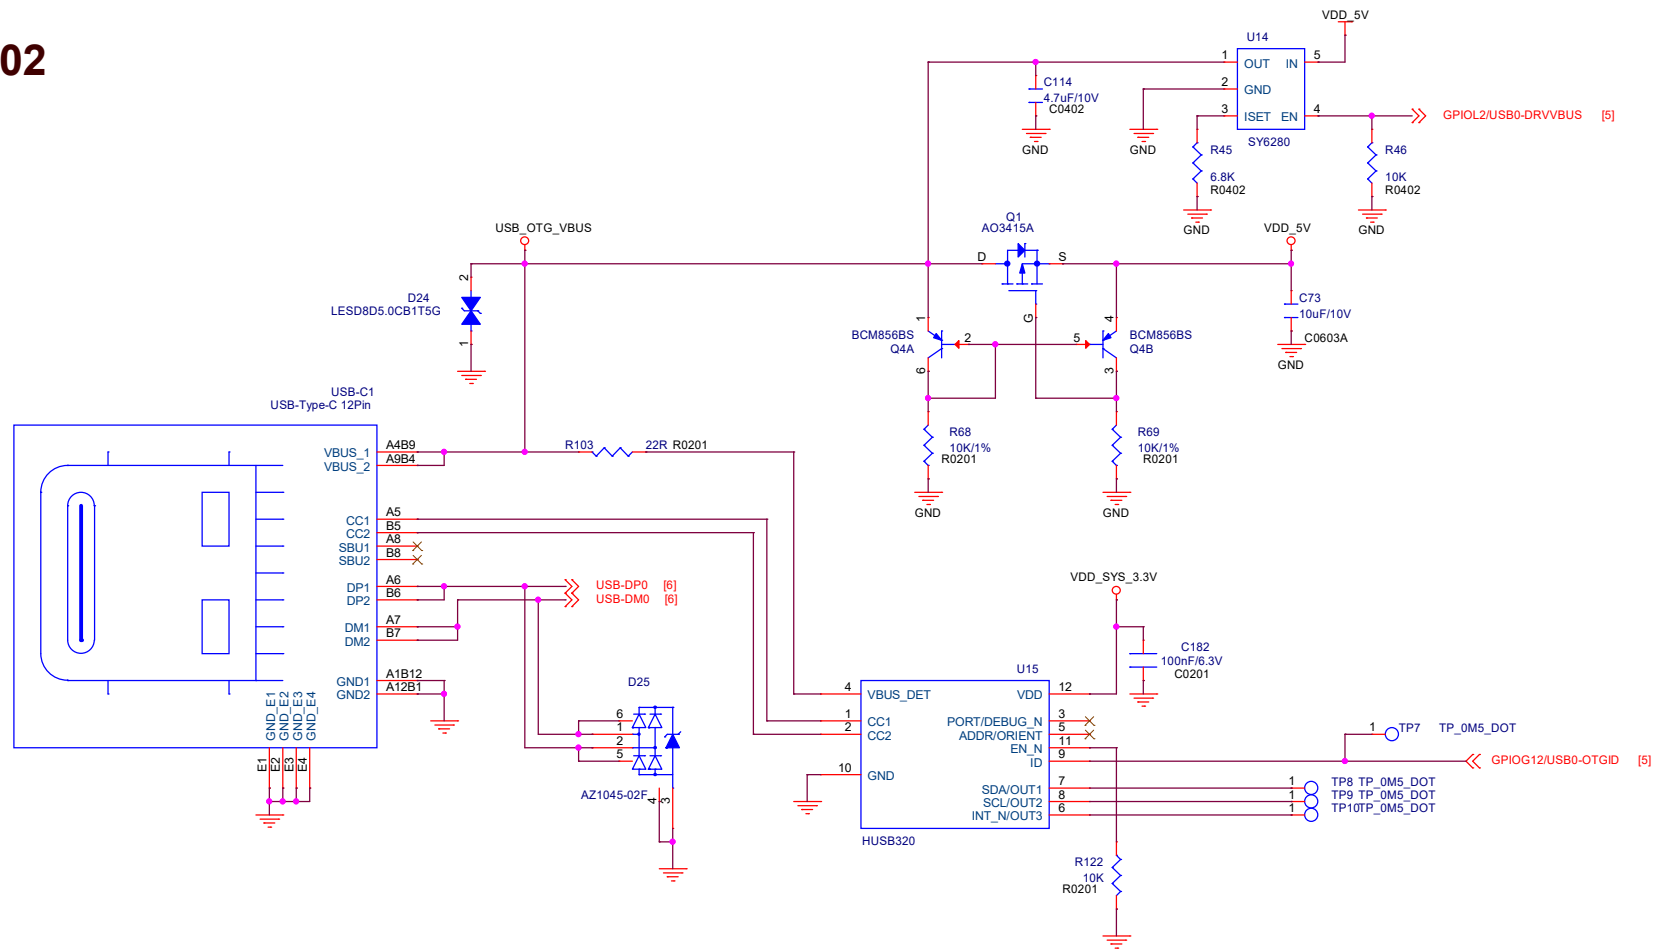








VCC-IO 3.3V/1A

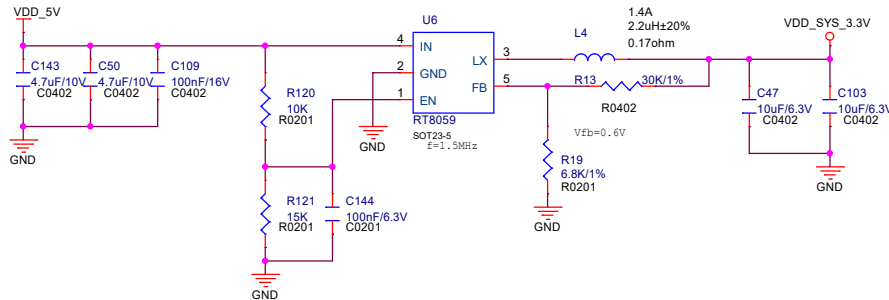



VCC-AVCC 3.3V

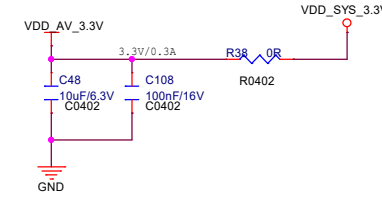

GPIO,LEDs,TF Card,SPI Flash

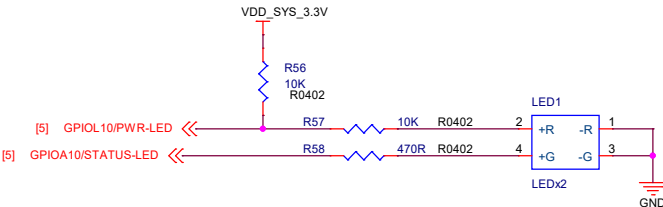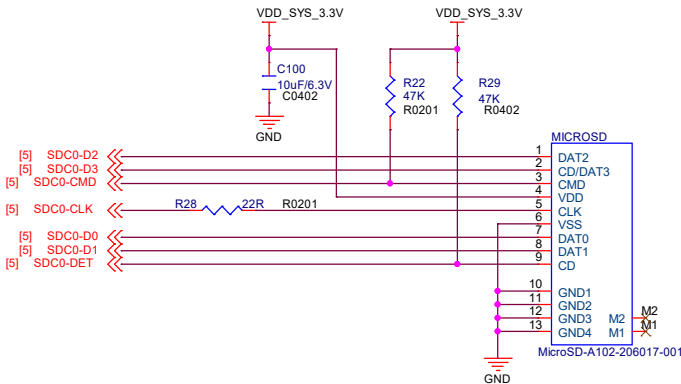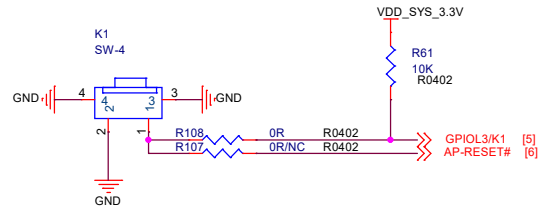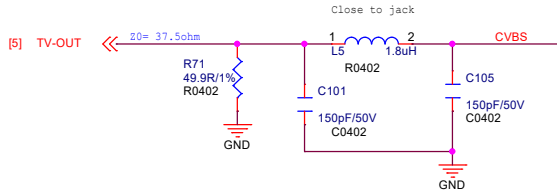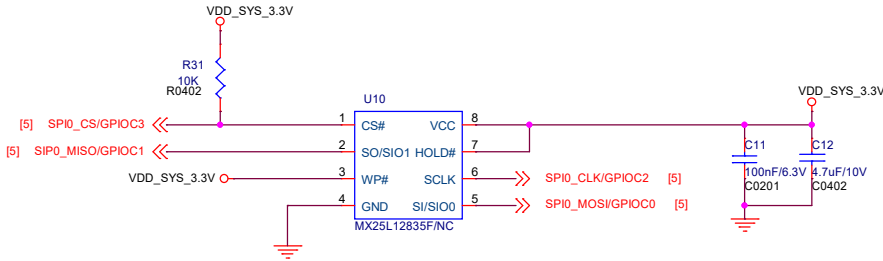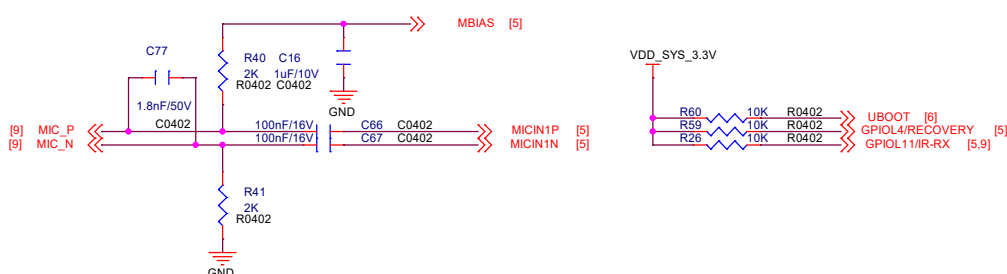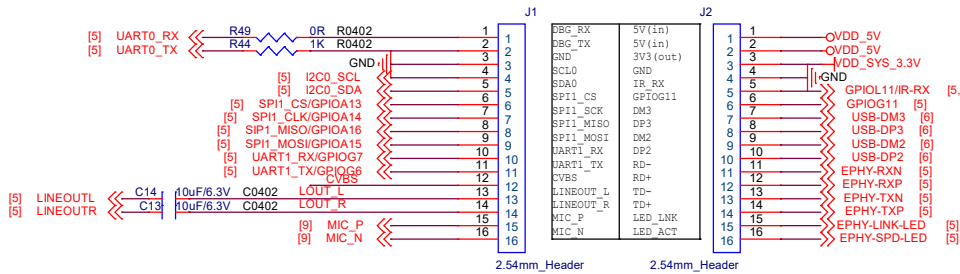

WIFI

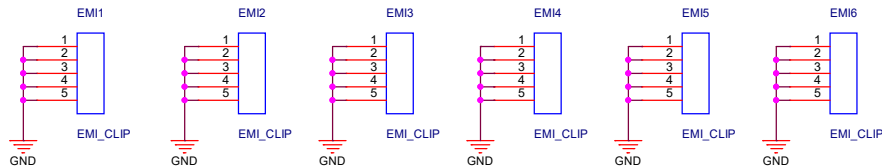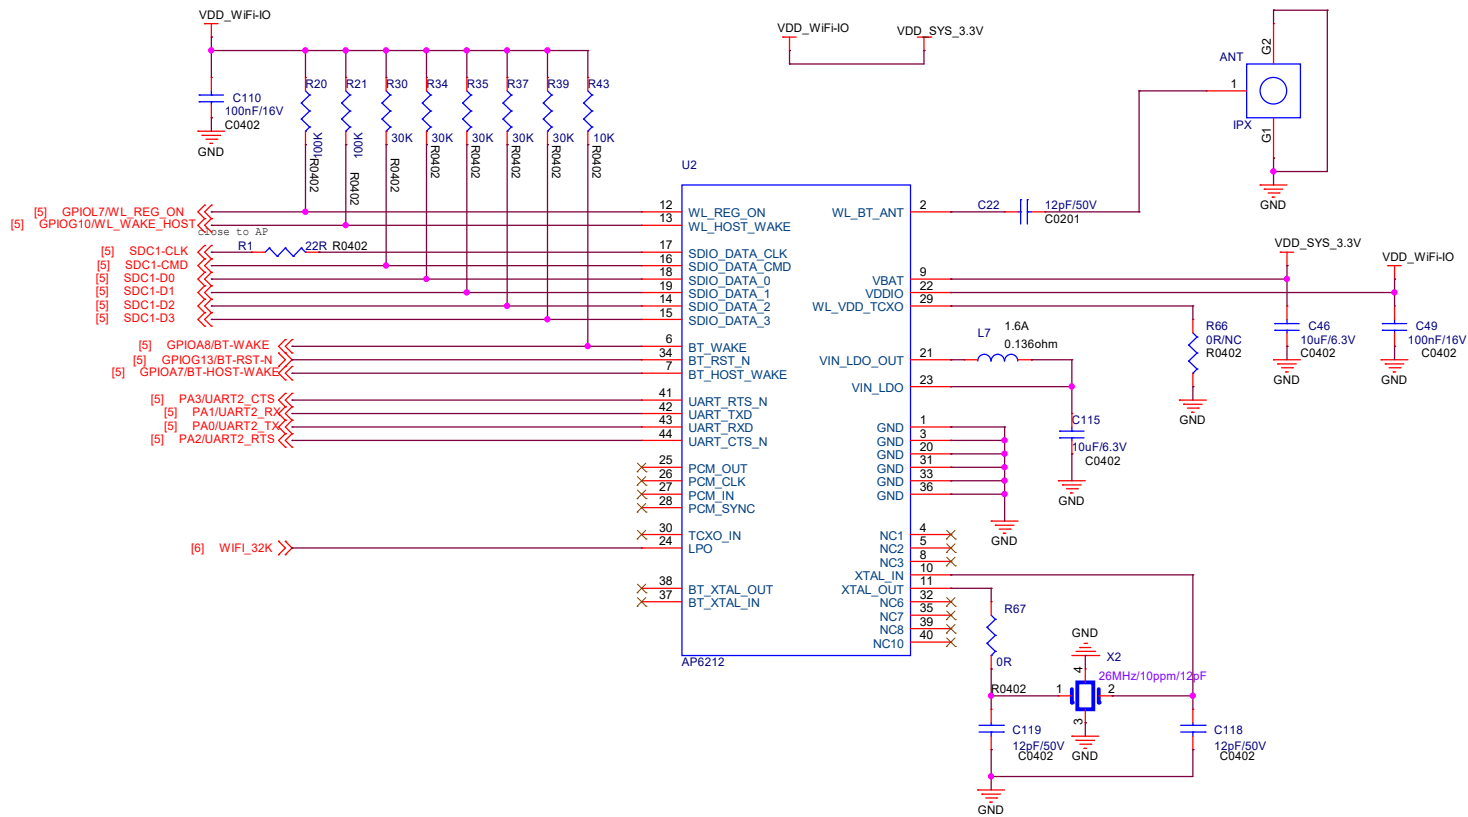

Camera

